

OVER TWO AND A HALF MILLION VALVES SOLD MAKE JANDY THE INDUSTRY STANDARD.



Never needs lubrication. Guaranteed never to fail.

You'll never need to worry about a Jandy Never Lube™ Valve. That's because Never Lube Valve diverter seals are made of a special proprietary material that is guaranteed never to leak or break for the life of the valve. And best of all, Never Lube diverters never need lubrication.

Easiest to install, easiest to use.

Never Lube Valves have a unique port design that comes in both 1½"-2" and 2"-2½" sizes, so they'll fit almost any plumbing situation. And you can plumb any port as inlet. They are much easier to turn and set than other valves, too.

Best materials, best design.

Never Lube Valves are made out of CPVC, so they are resistant to temperature and chemical fluctuations, and the Never Lube Valve body is designed to allow maximum water flow while maintaining structural strength.

18 quality tests on every valve.

Jandy Valves pass 18 different quality control checks before leaving the factory. Jandy Valves have no defects because they are 100% quality tested.

Easy to motorize, simple to automate.


Every Jandy Valve can be automated using Jandy JVA Valve Actuators. JVAs are easy to install and make valve operation automatic.

The industry standard.

Pool and spa professionals have made Jandy the industry standard in valves. Jandy Industries is well on its way to selling three million valves for one reason—a reputation for quality.



Automate any Jandy Valve with a JVA.

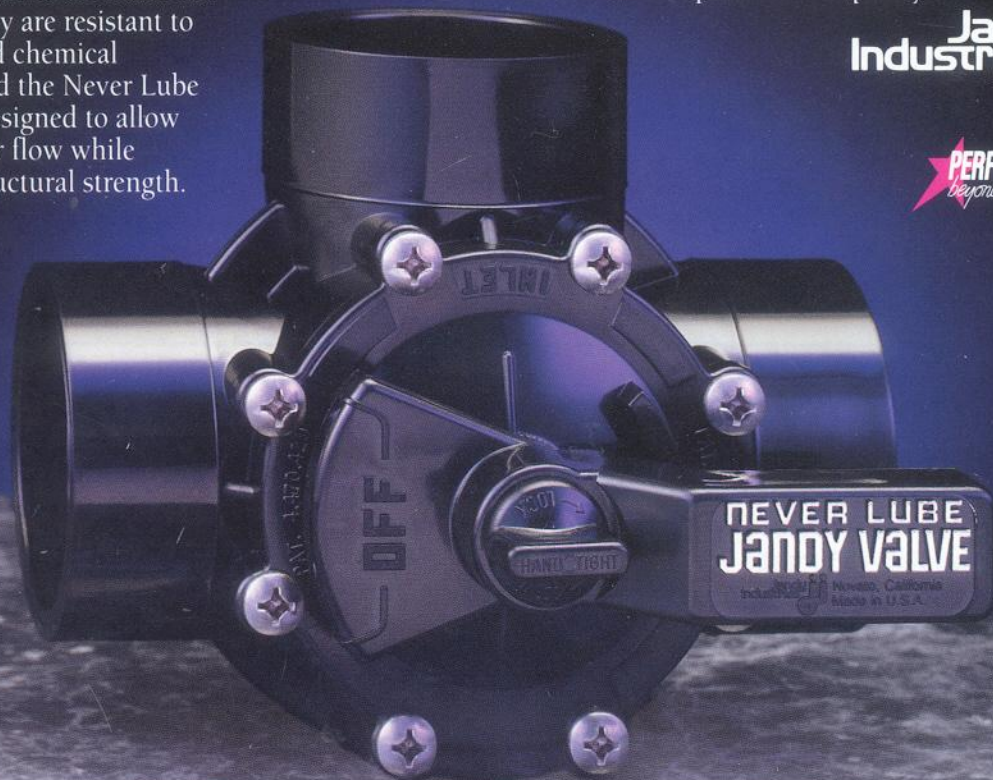

PERFORMANCE
beyond your expectations



JANDY NEVER LUBE™ VALVES

Jandy Industries 21 Pimentel Court, P.O. Box 6101, Novato, CA 94948-6101 Phone (800) 227-1442 FAX (415) 382-8091

JANDY VALVES

Jandy Three-Port Valves

Standard Valve

Part #	Description
4717	2"-2½" NeverLube™ Valve
4715	1½"-2" NeverLube™ Valve
2875	2"-2½" Positive Seal Valve
1154	1½"-2" Positive Seal Valve
3344	1½"-2" Non Positive Seal Valve
2877	2"-2½" Non-Positive Seal Valve

Space Saver™ Valve

Part #	Description
3406	Space Saver™ Positive Seal Valve
3408	Space Saver™ Non Positive Seal Valve

Jandy Two-Port Valves

Standard Valve

Part #	Description
4716	2"-2½" NeverLube™ Valve
4724	1½"-2" NeverLube™ Valve
2876	2"-2½" Positive Seal Valve
1157	1½"-2" Positive Seal Valve
2878	2"-2½" Non-Positive Seal Valve
2220	1½"-2" Non Positive Seal Valve

Space Saver™ Valve

Part #	Description
3407	Space Saver™ Positive Seal Valve
3409	Space Saver™ Non Positive Seal Valve

Jandy 90° Valves

Standard Valve

Part #	Description
4367	1½"-2" Positive Seal Valve
4369	2"-2½" Positive Seal Valve

Space Saver™ Valve

Part #	Description
4371	Space Saver™ Positive Seal Valve

Jandy Spa Valves

Jandy Standard Spa Valves

Part #	Description
2219	1½"-2" Three Port Non-positive Spa Valve
5392	1½"-2" Three-Port NeverLube™ Spa Valve (B23)
5046	1½"-2" Three-Port NeverLube™ Spa Valve (C3)
5051	1½"-2" Three-Port NeverLube™ Spa Valve (B)
3353	2"-2½" Three-Port Non-positive Spa Valve
5052	2"-2½" Three-Port NeverLube Spa Valve (B)

Jandy Space Saver™ Spa Valves

Part #	Description
Various	Three-Port Non-positive Spa Valve
3550	Four-Port Non-seal Spa Valve (Single)
3551	Four-Port Non-seal Spa Valve (Double)
3656	Three-Port "T" Non-seal Positive Spa Valve

Materials Used:

- Valve Screws: Stainless Steel
- Valve Knob: ABS Plastic
- Valve Handle: ABS Plastic
- Valve Cover: CPVC Plastic
- Large O-Ring (151): Teflon-impregnated plastic
- Small O-Ring (116): Teflon-impregnated plastic
- Valve Housing (Main Valve Body): CPVC plastic
- Valve Diverter: Glass-filled Noryl
- Valve Diverter Seal, Standard Valve:
Buna N Rubber
- Valve Diverter Seal, NeverLube™ Valve:
NeverLube™ Material

Technical Specifications:

- Working Pressure: 50 psi.
- Burst Pressure: 200 psi.
- Positive Seal Back Pressure: 15 psi.
- Chlorine Resistant
- Acid Resistant
- Ozone Resistant

IAPMO®



Phone # 415/382-8220
Fax # 415/382-8091

Jandy Industries
21 Pimentel Court
P.O. Box 6101
Novato, CA 94948-6101